



SMART Digital S

DDA/DDC

DDA ≤ 30 l/h (8 gph)DDC ≤ 15 l/h (4 gph)Installation and
operating instructions DDAnet.grundfos.com/qr/i/95724708Installation and
operating instructions DDCnet.grundfos.com/qr/i/95726994



Min./Max.
-10 °C / +45 °C
14 °F / 113 °F



Min./Max.
0 °C / +45 °C
32 °F / 113 °F







≤ 60 dB(A)



IP 65
(Nema 4x)



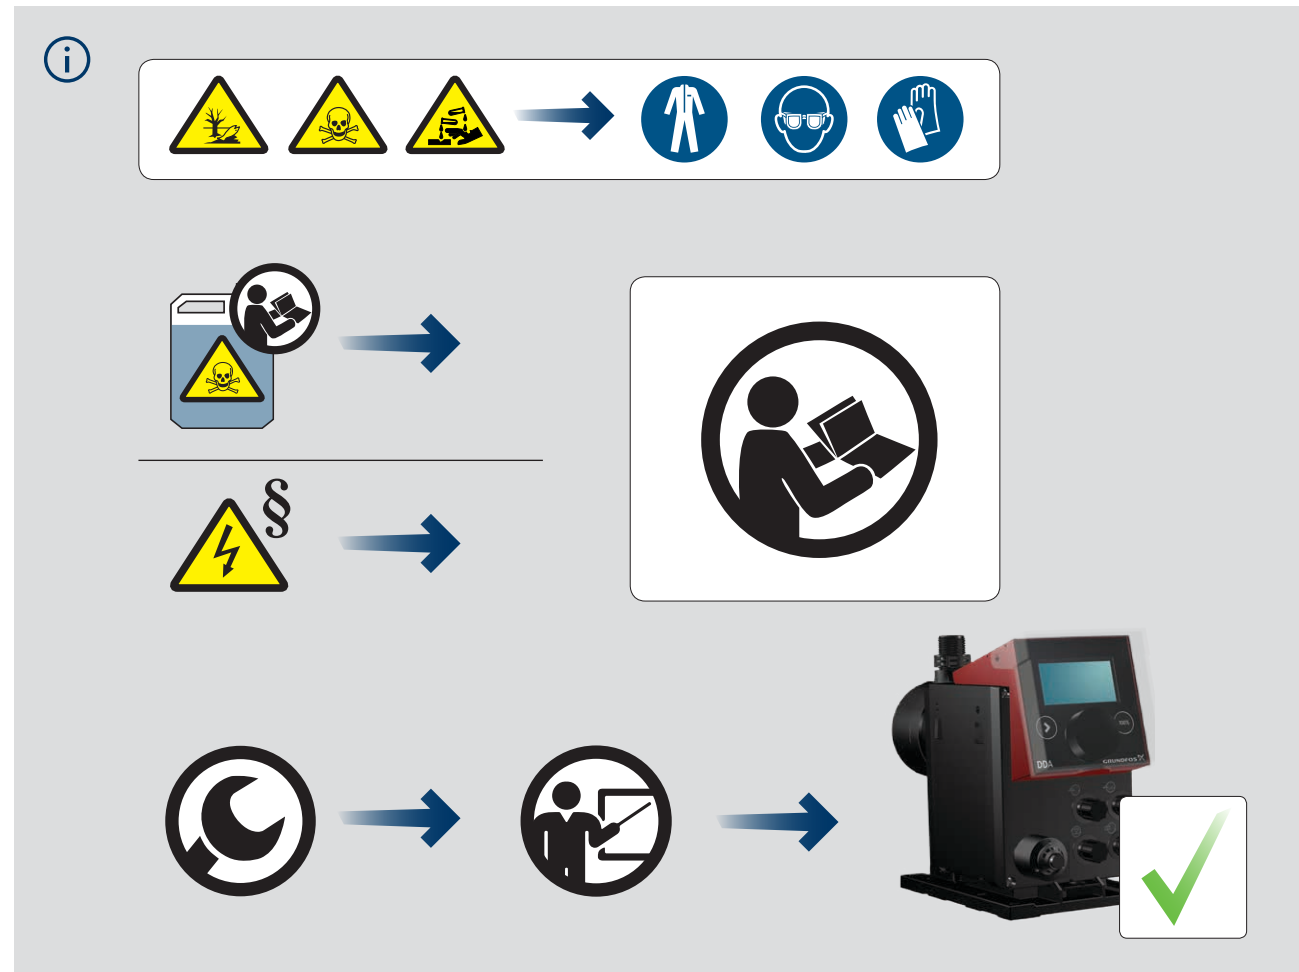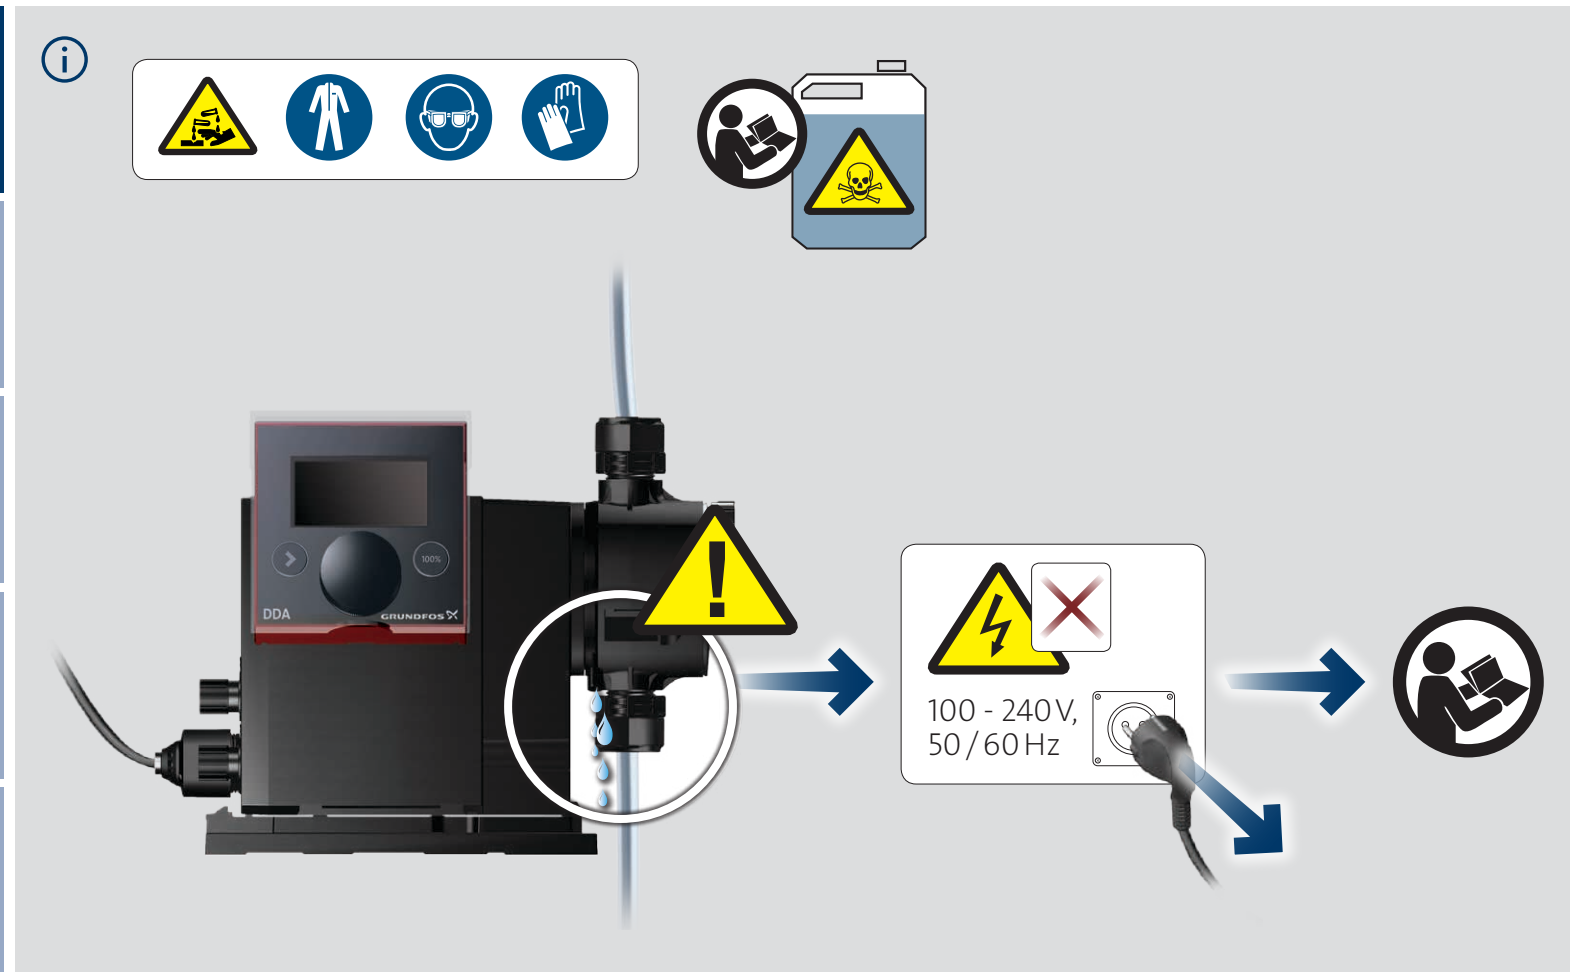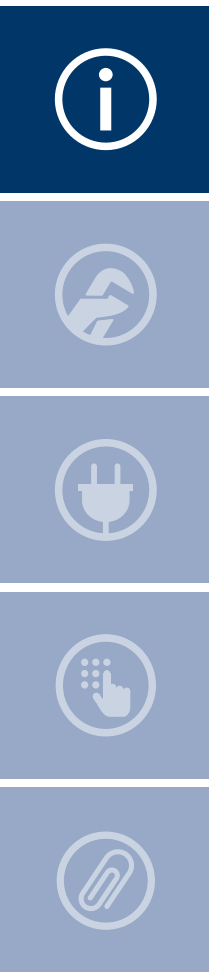

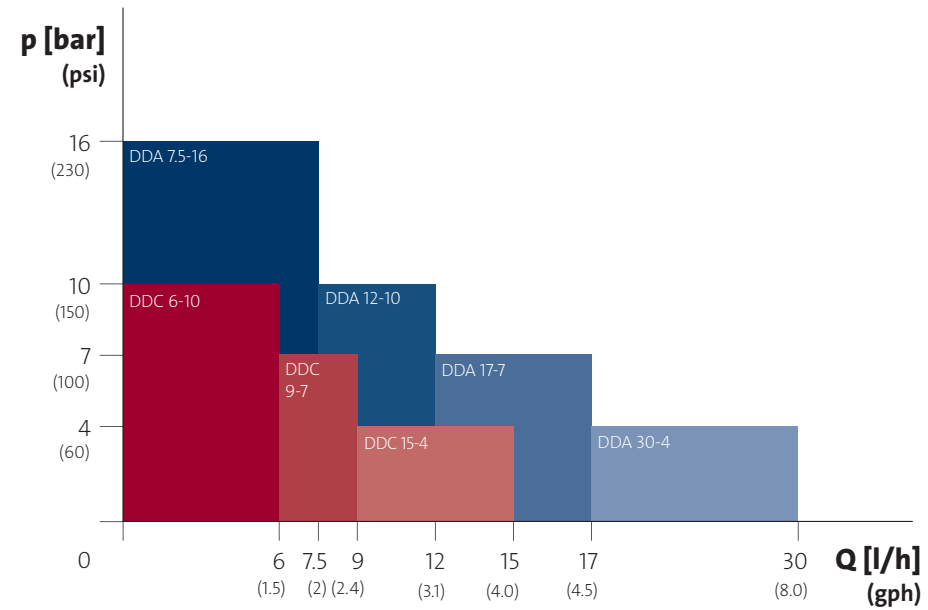

$p_2 - p_1 \geq 1 \text{ bar (15 psi)}$






100 - 240V,
50/60 Hz



Max.
1.5 m/59"

Min.
100 mm/4"

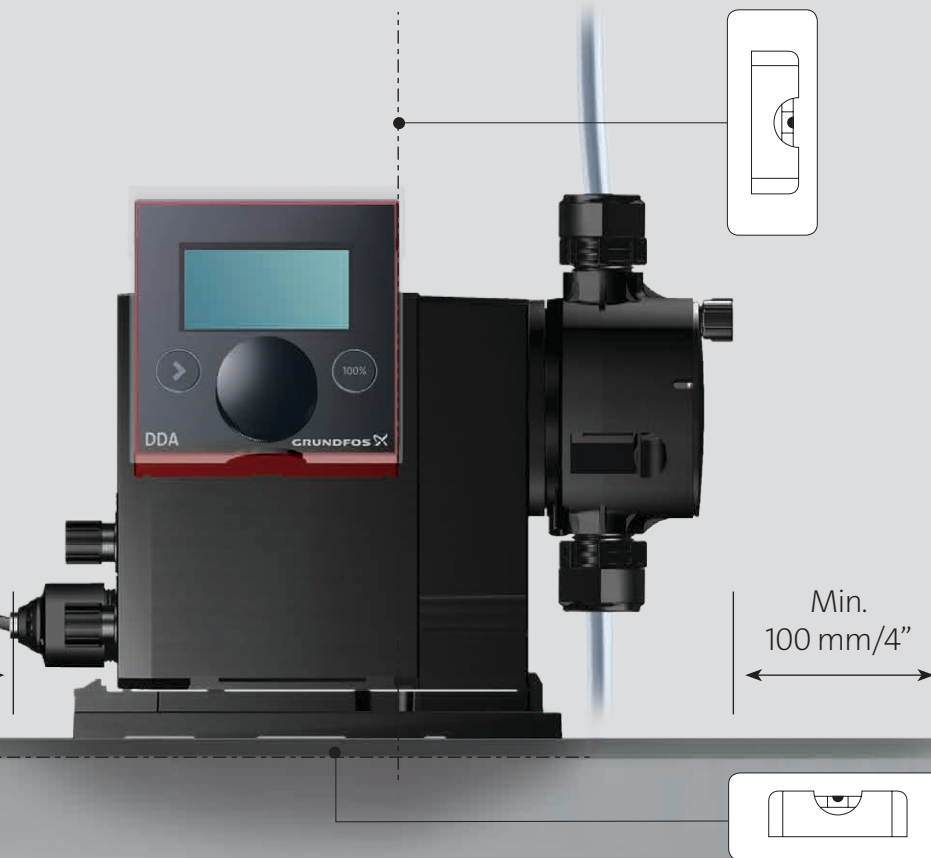


Max.
4 kg/8.8 lb






1




2




3



4




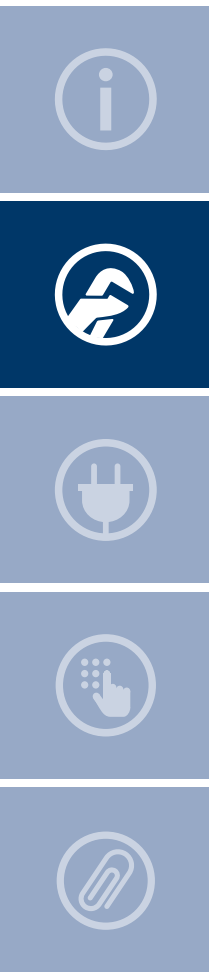

5




6a


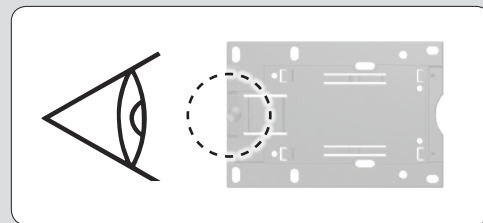


7a



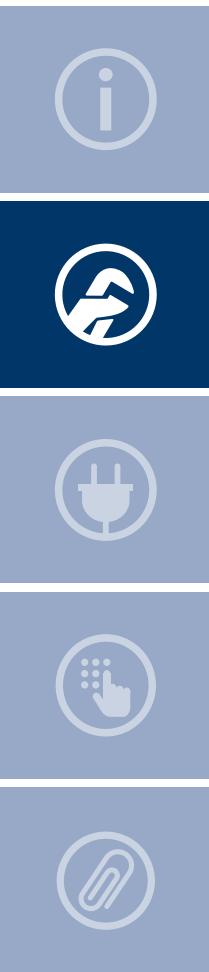


6b

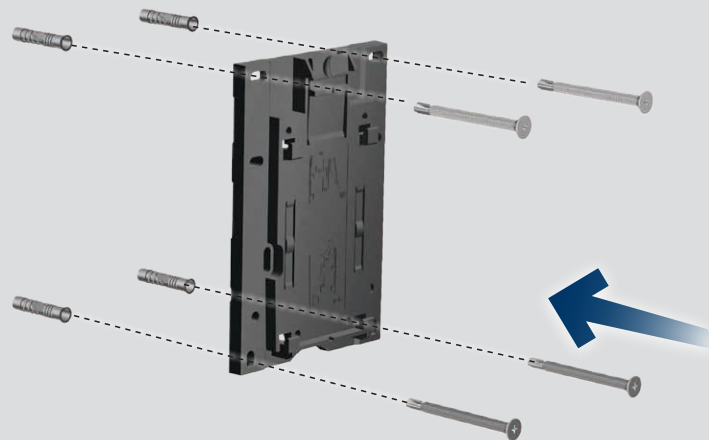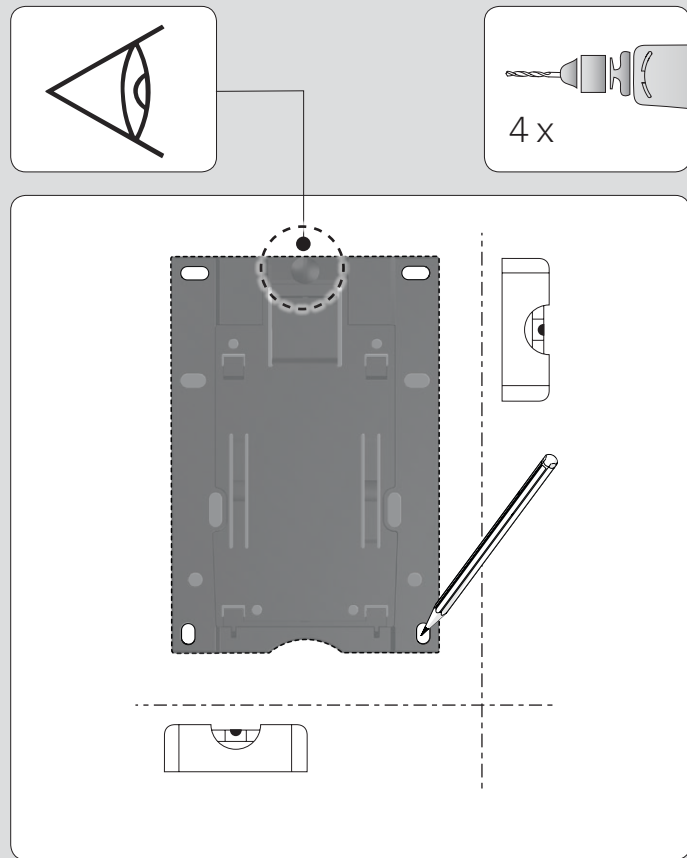



Ø 5 mm (0.2")

7b









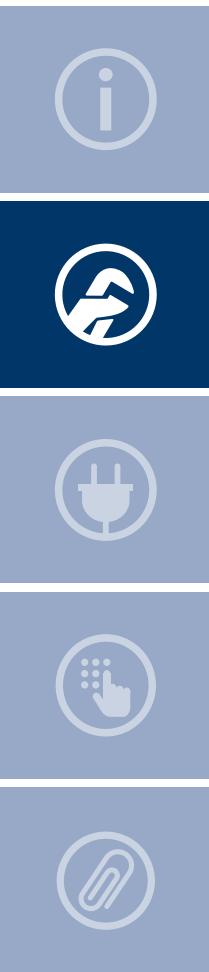


8

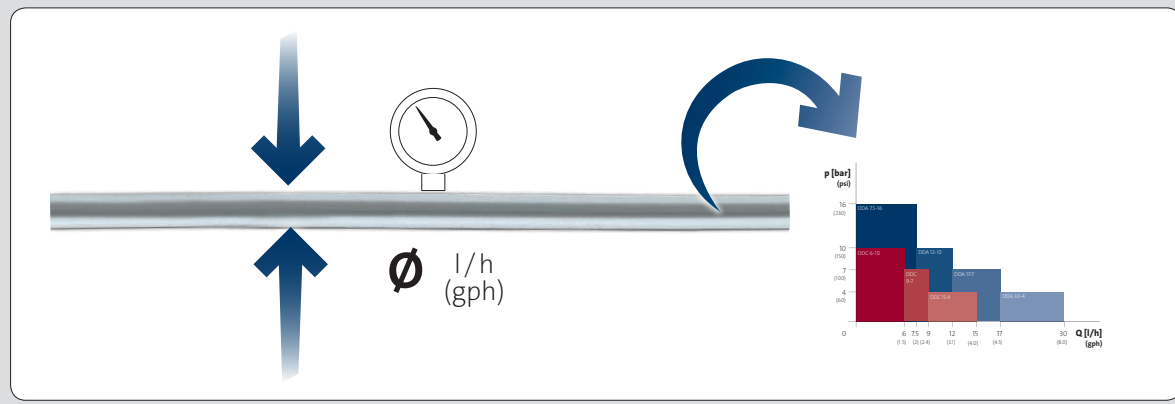



9

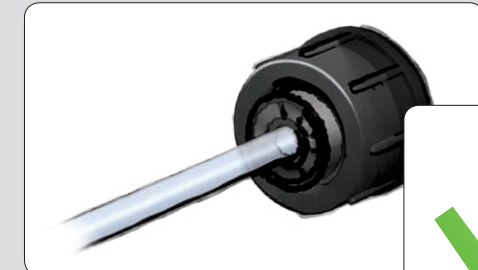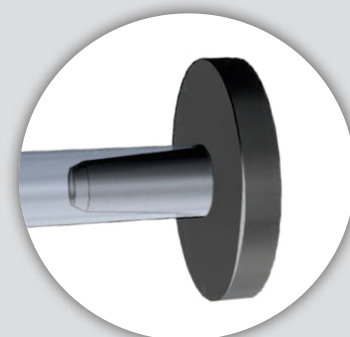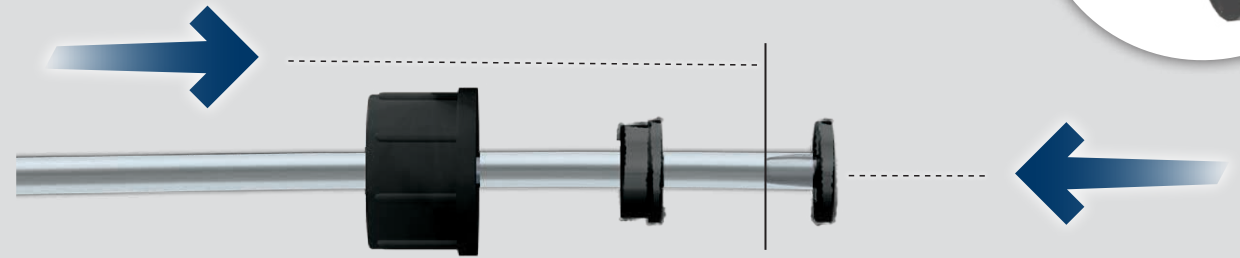

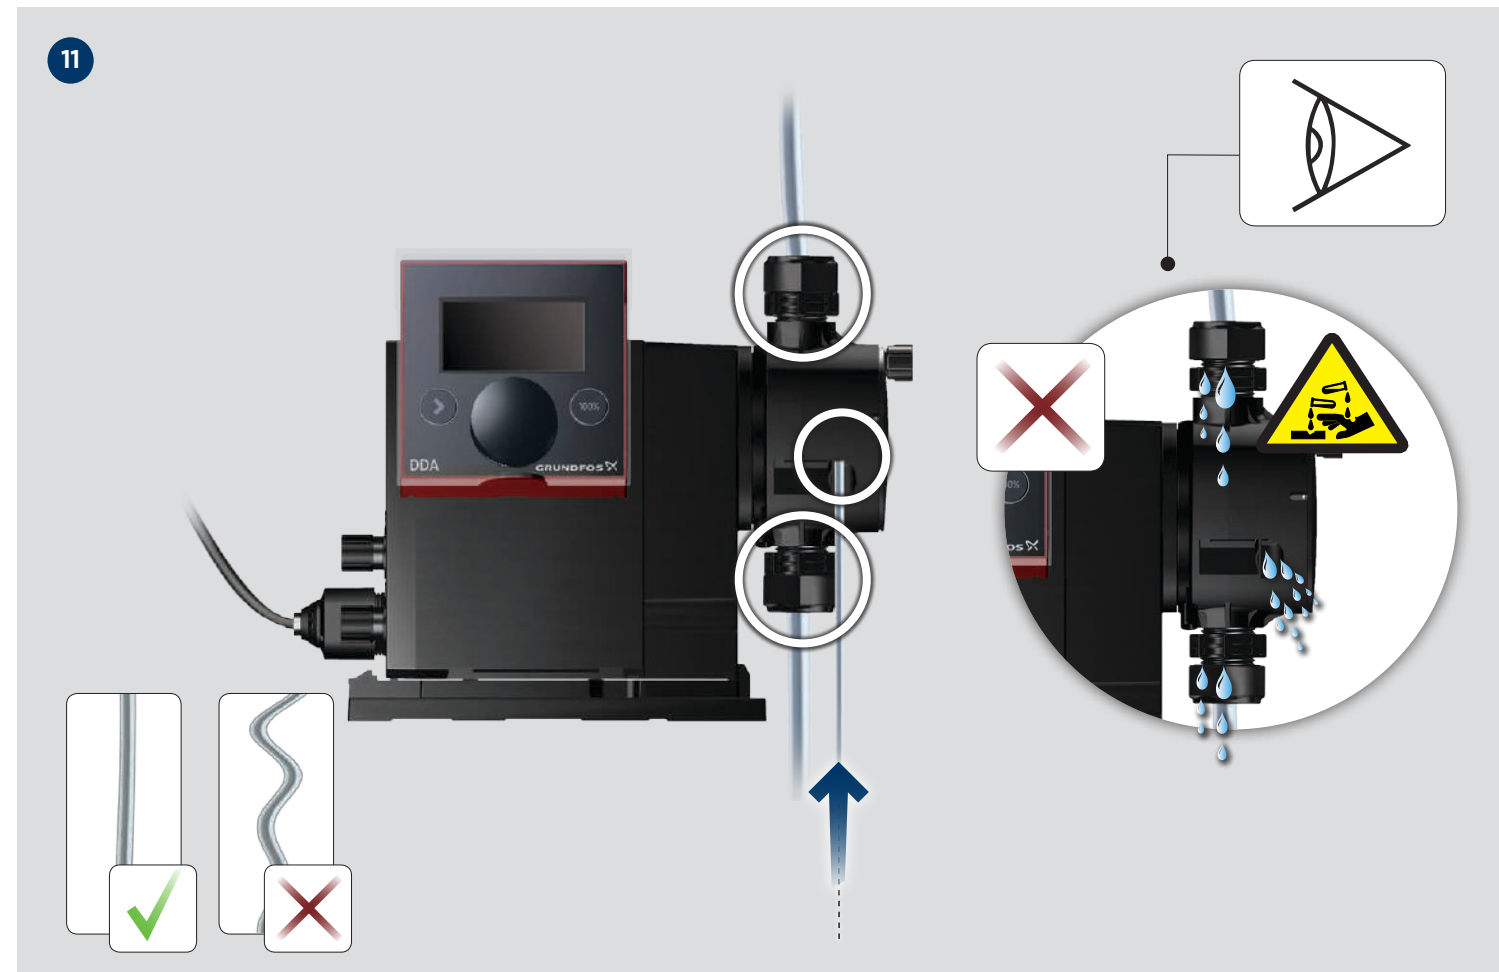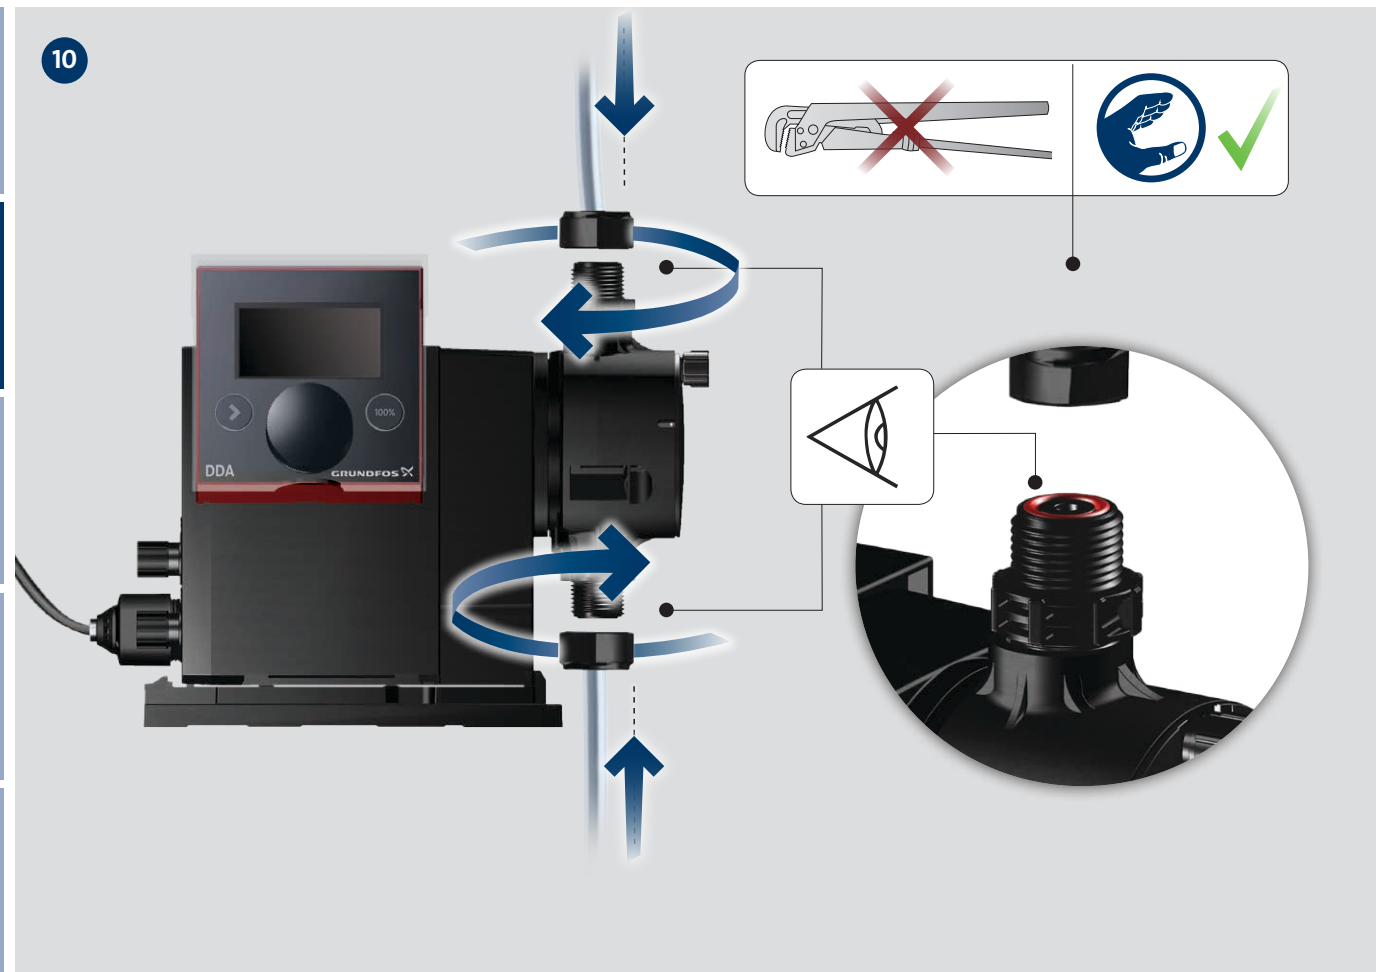
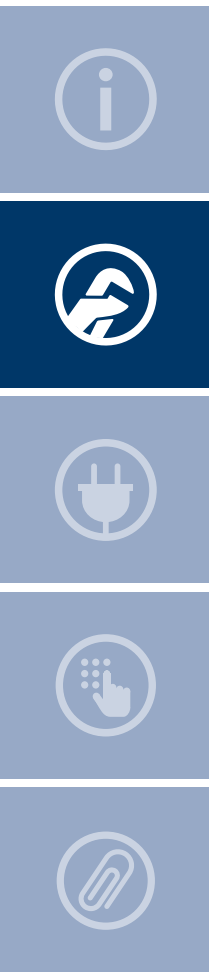








12




* ≠ DDC-A



≠ DDC-A









≠ DDC





13



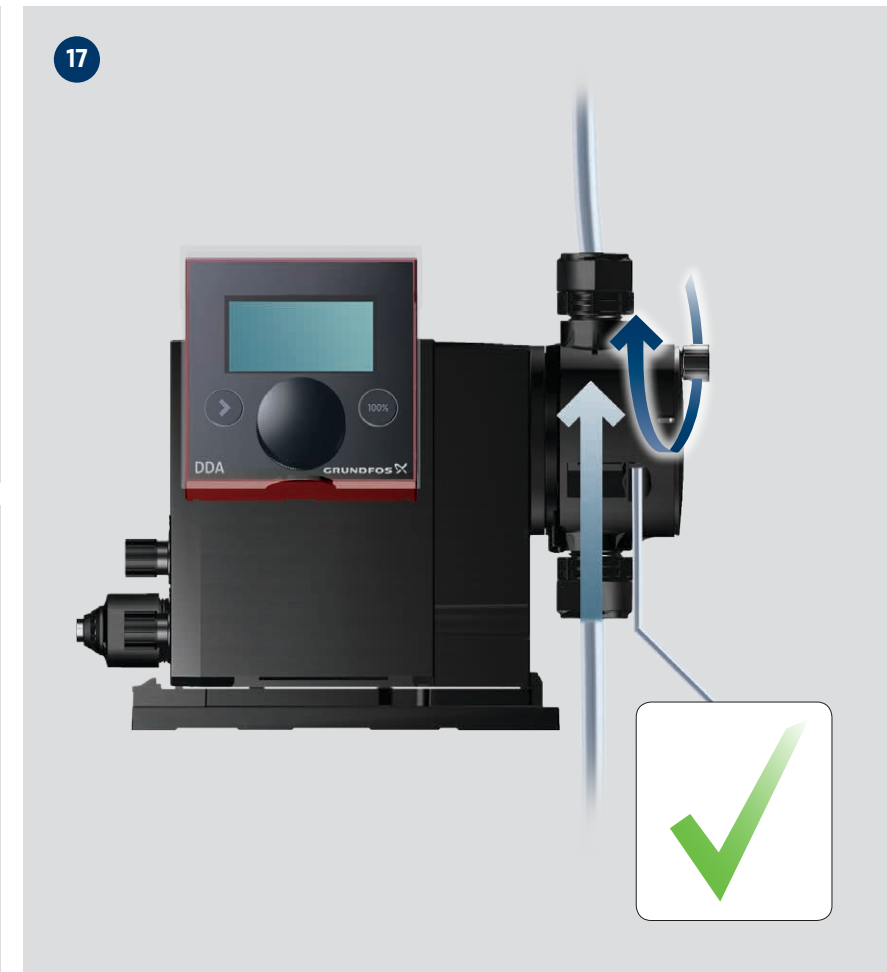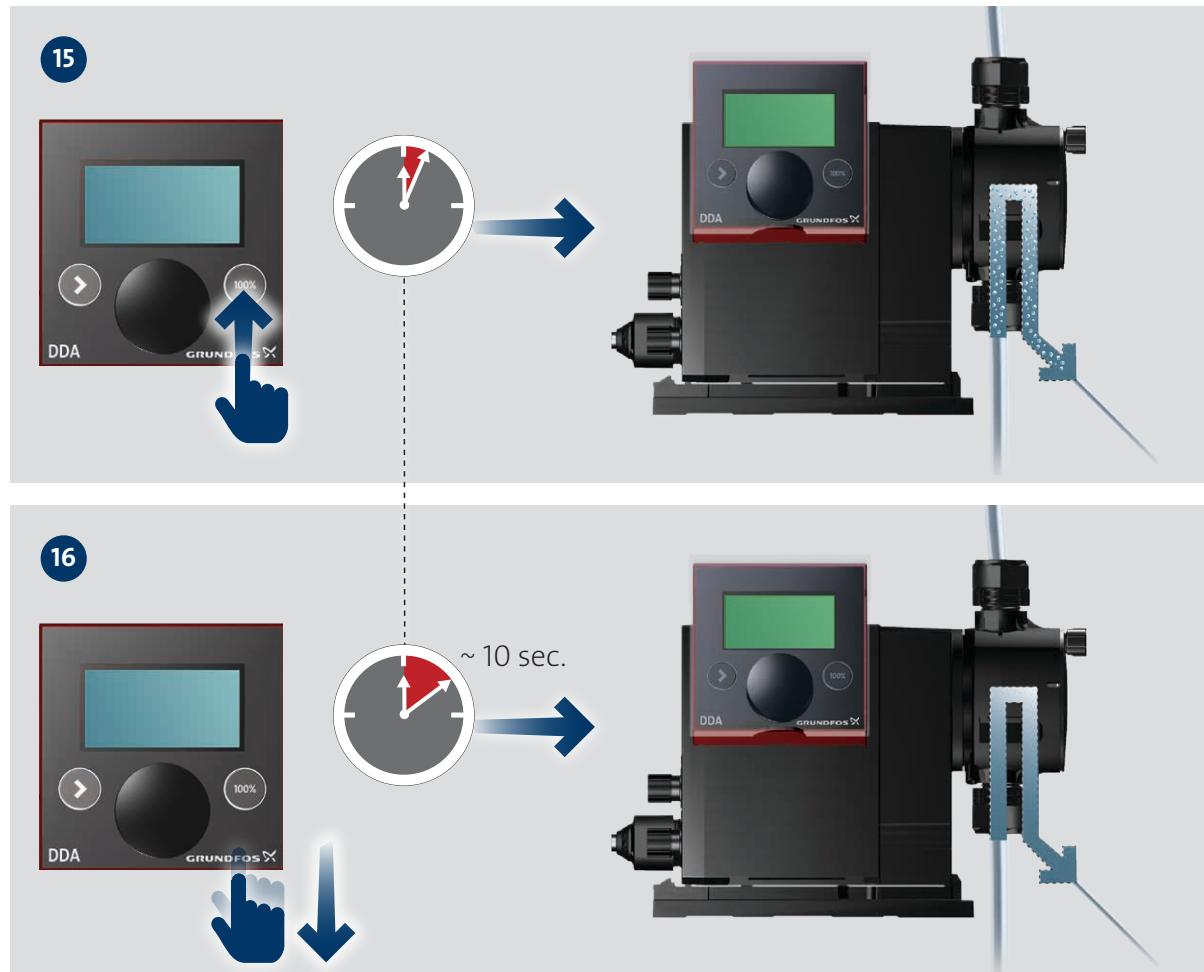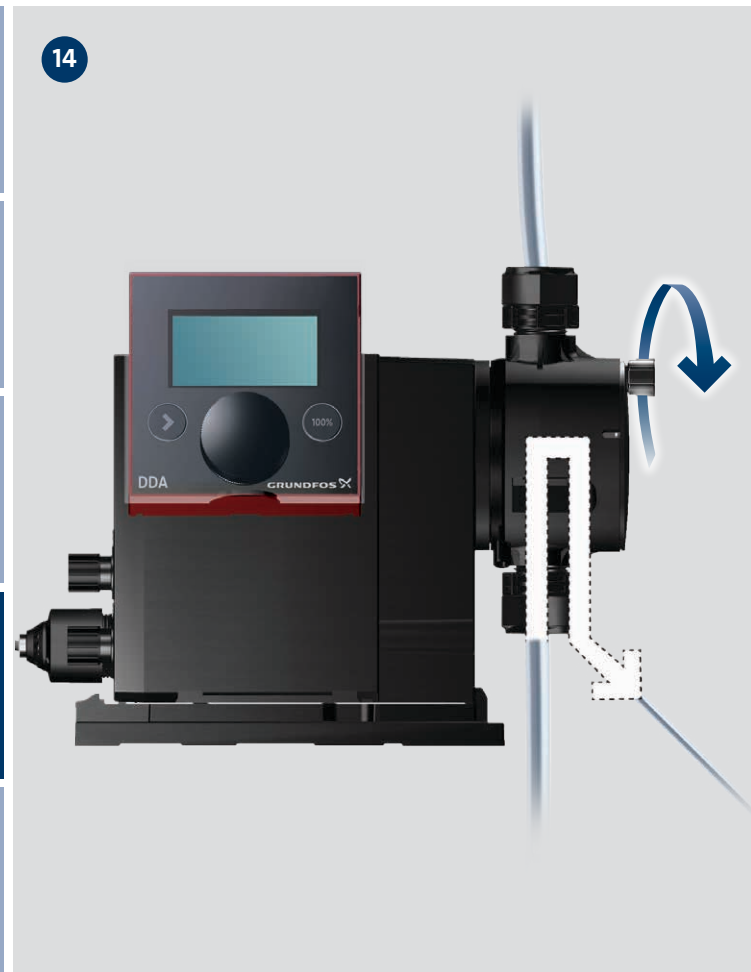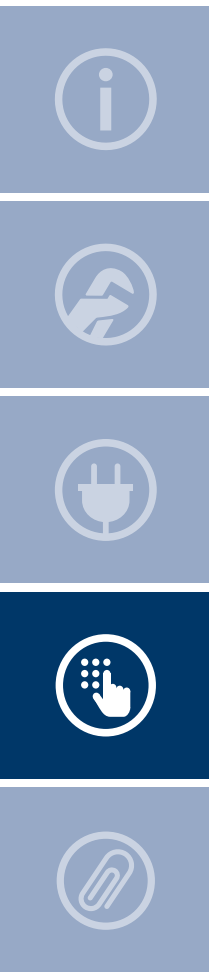



18



V1 e.g. 300 ml





V2 e.g. 190 ml



V1 - V2

e.g. 300 - 190 ml = 110 ml



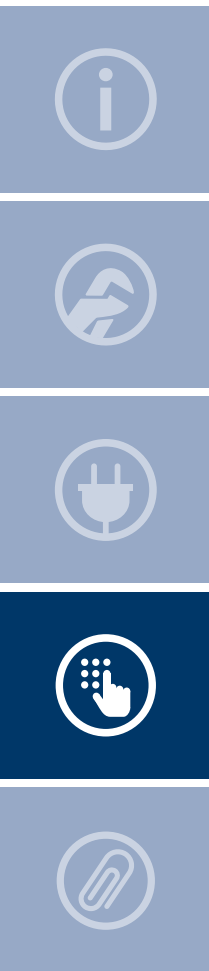

19

Ok



Ok






Warning



Alarm



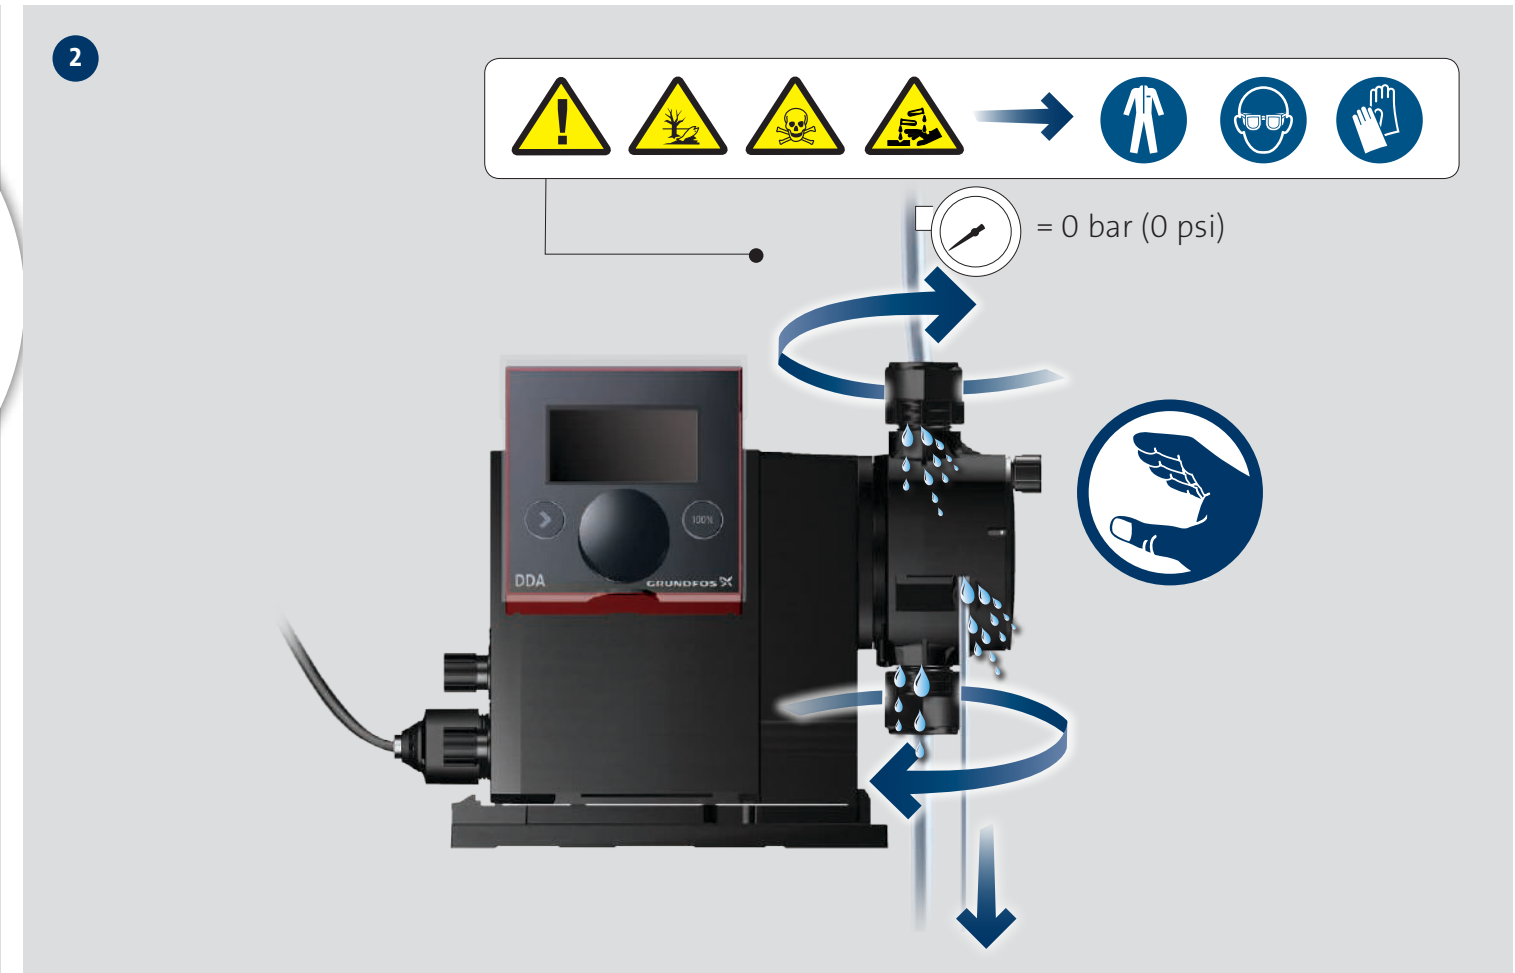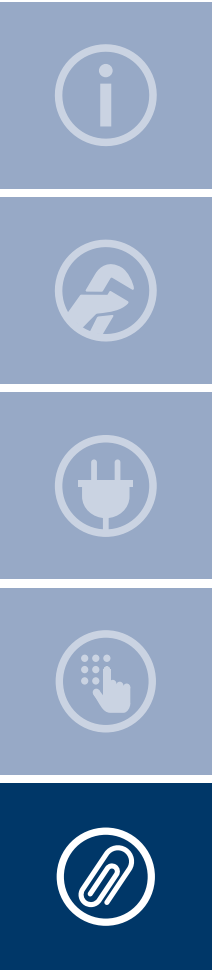


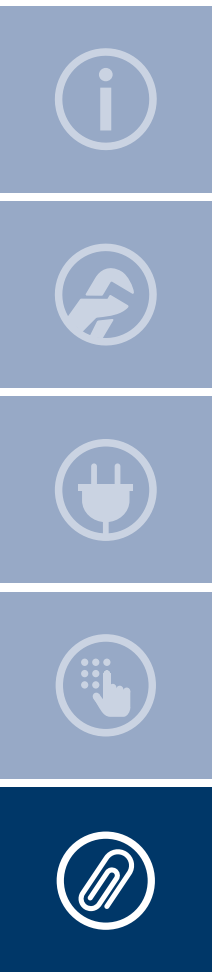


3



4

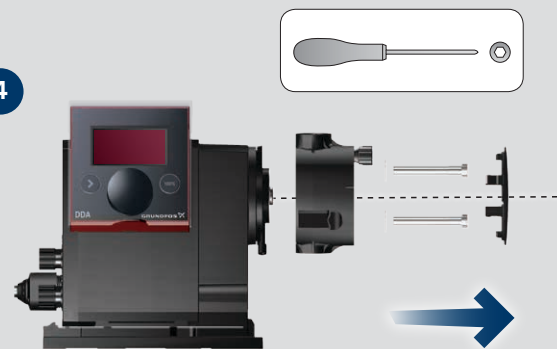


5

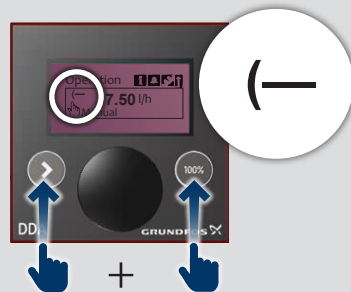


6





7

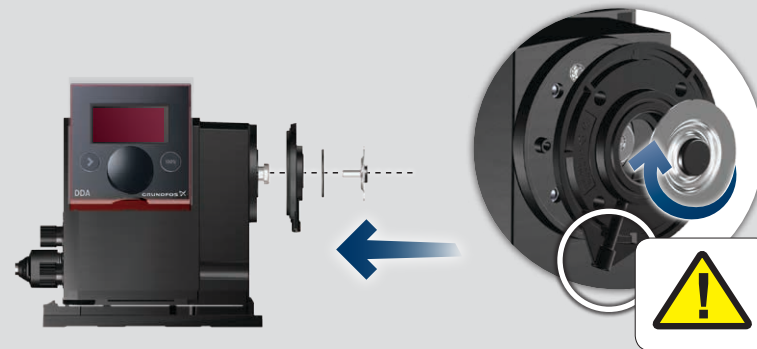




8

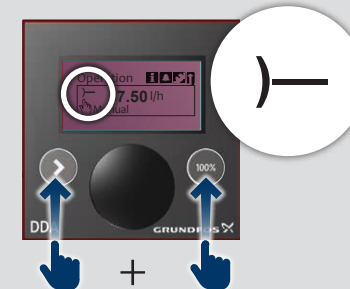

9

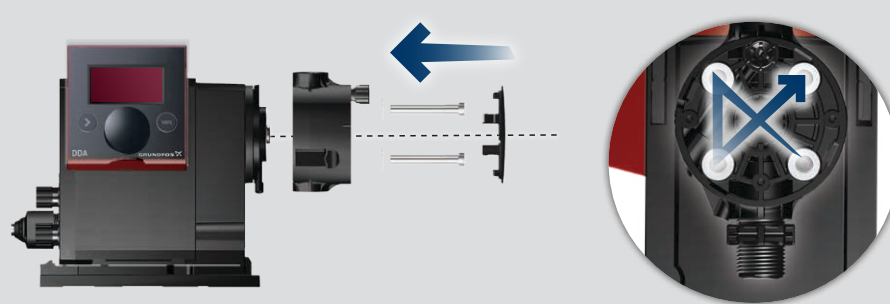

4 Nm (2.95 lb/ft)

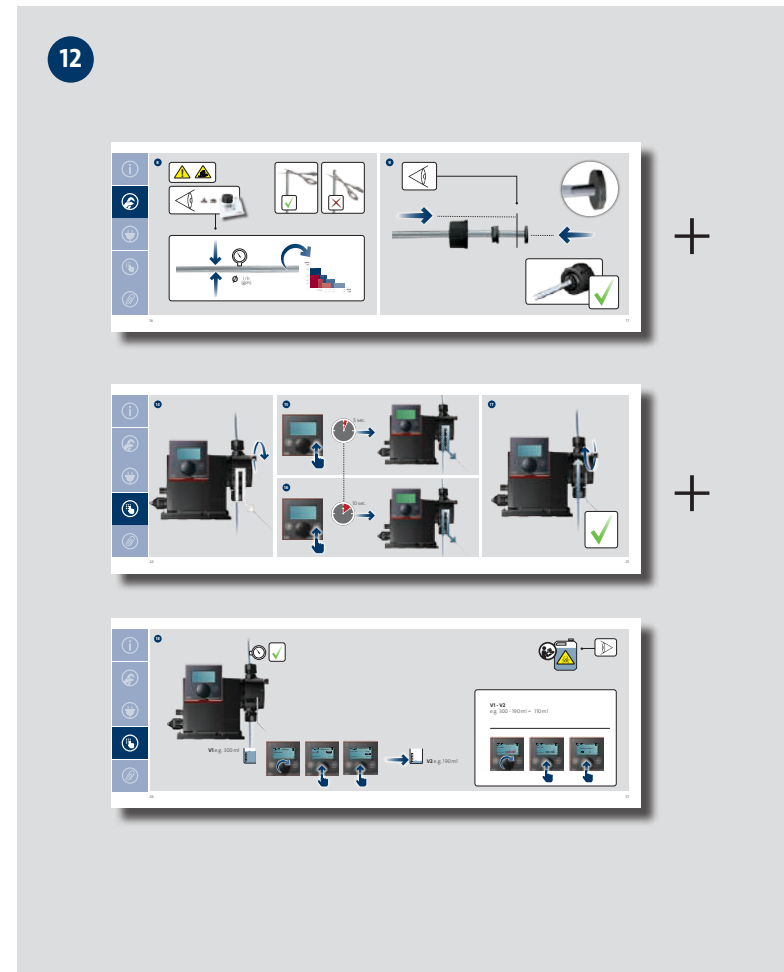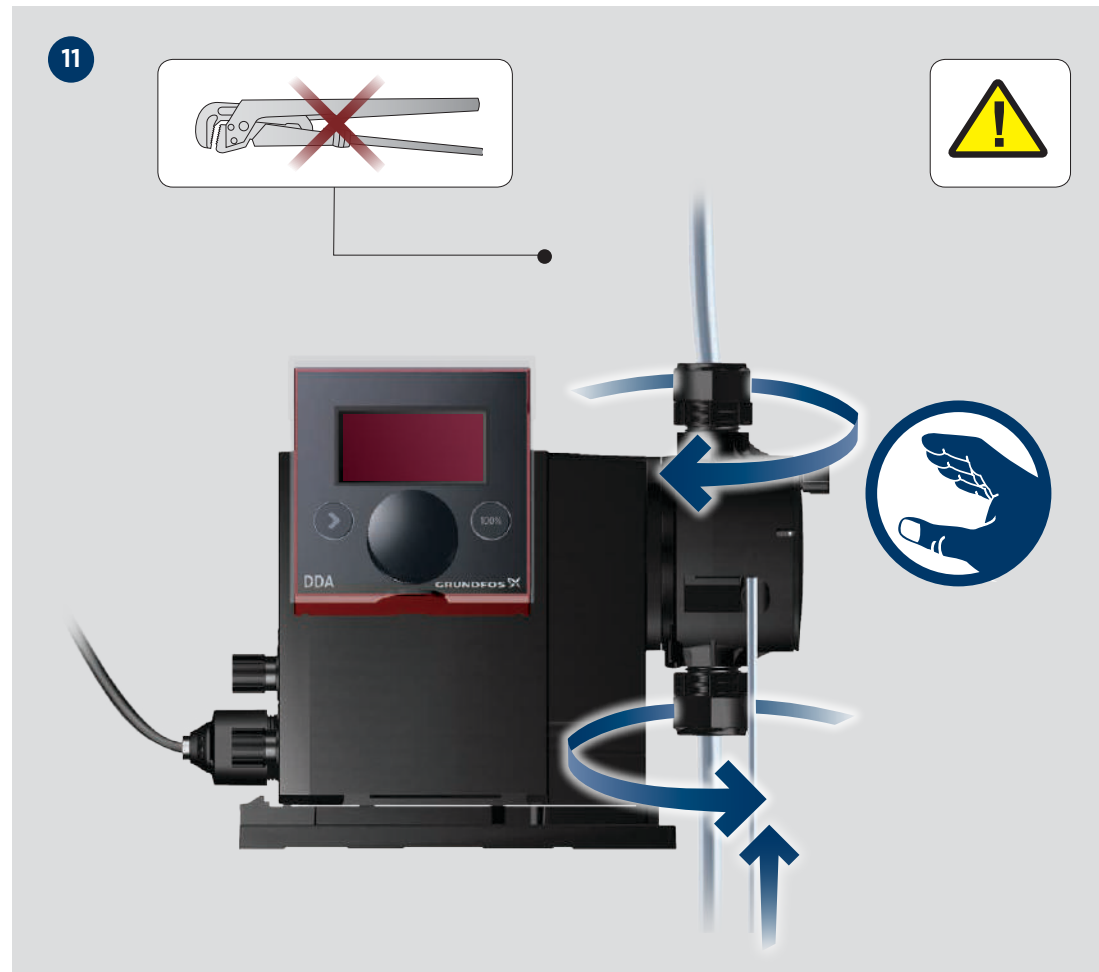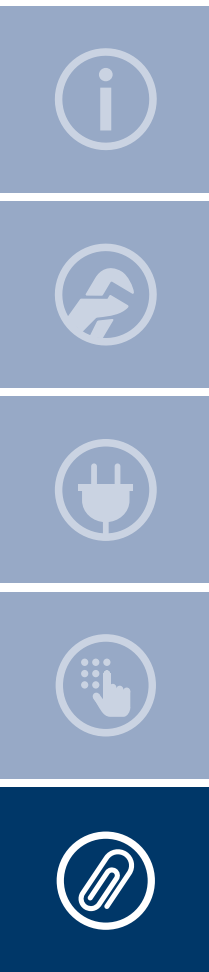

be think innovate

95725552 0617

ECM: 1210890

GRUNDFOS Holding A/S
Poul Due Jensens Vej 7
DK-8850 Bjerringbro
Tel: +45 87 50 14 00
www.grundfos.com

GRUNDFOS 

The name Grundfos, the Grundfos logo, and be think innovate
are registered trademarks owned by Grundfos Holding A/S
or Grundfos A/S, Denmark. All rights reserved worldwide.